
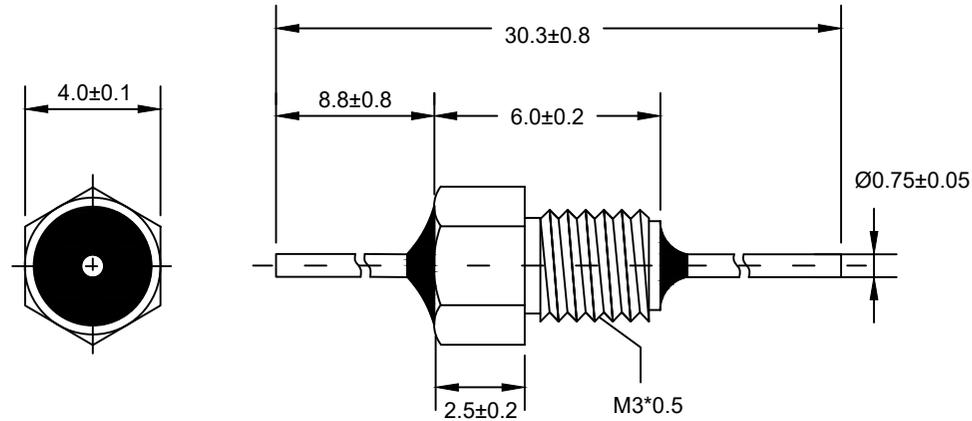


# PRODUCT DATASHEET

Electrical testing accordance with:  
 《GB/T5968-2011》  
 《GB/T5966-2011》  
 LCA standard test

Do not Scale this Drawing  
 Unit : mm



|   |                |                    |               |        |                  |                 |                |                                   |                                  |   |  |
|---|----------------|--------------------|---------------|--------|------------------|-----------------|----------------|-----------------------------------|----------------------------------|---|--|
| Capacitance   | Cap. Tolerance | Dissipation Factor | Rated Voltage | D.W.V. | Rated Current(A) | I.R.(100VDC)    | Temp. Coef.    | Temp. Range                       |                                  |   |  |
| 4700pF  | -20%+80%       | ≤3.5%              | 100VDC        | 300VDC | 7                | ≥3000MΩ         | Y5V            | -25°C+85°C                        |                                  |   |  |
| Min. No Load Insertion Loss (dB)@25°C   |                |                    |               |        |                  |                 | Install Torque | Soldering Temp                    | CIRCUIT                          |   |  |
| 10KHz   | 100KHz         | 1MHz               | 10MHz         | 100MHz | 1GHz             | 10GHz           |                |                                   | ≤300°C/3S                        | C |  |
| --  | --             | --                 | 15            | 30     | 42               | 52              | 0.16 N·m       |                                   |                                  |   |  |
| Material and other parameter note:<br>1. The case material is nickel-plated brass, and the lead material is silver-plated brass.<br>2. Encapsulated with epoxy resin.<br>3. The above data is measured under 25°C conditions, and the electrical performance test frequency is 1KHz/1V.<br>4. It is recommended to use a soldering iron for soldering. Immersion soldering is strictly prohibited, and the capacitor body must not be struck with hard objects. |                |                    |               |        |                  | Revision Record | 171017-01      | Product Series                    | Thread Mount Feedthrough Filters |   |  |
|   |                |                    |               |        |                  |                 | 260121-01      | LCA <sup>®</sup><br>made in China | <b>L4030-032BN</b>               |   |  |
|   |                |                    |               |        |                  |                 |                |                                   |                                  |   |  |