
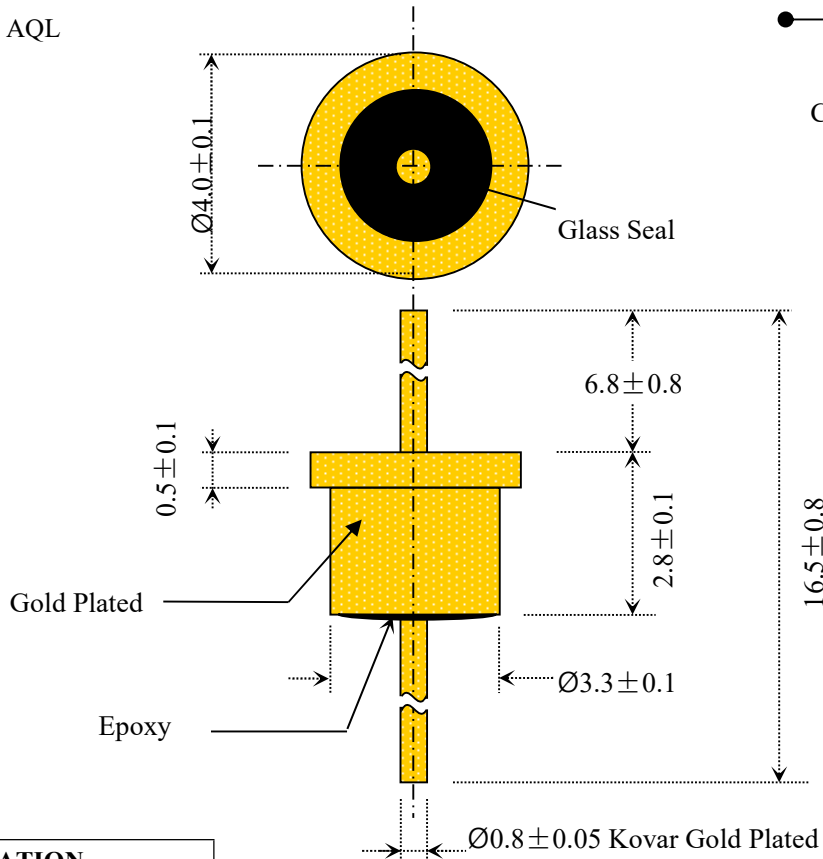



Sales Drawing

Do not Scale it()

Electrical Testing:

As Xiang wei standard test plans and GB/T-2828 AQL value Test Method.




SPECIFICATION

Capacitance	5000pF
Dissipation Factor	<3.5%
Cap Tolerance	-20%+80%
Dielectric	X7R
Rating Voltage	100VDC
D.W.V.	250VDC
Current(A)	7
I.R.100vdc	10G Ω
Operating Range	-55°C+125°C

Notes:

- 1、 Do not use a hard object percussion capacitor body
- 2、 Storage:Usual temperature by sealed.
- 3、 Soldering:Using constant electric iron soldering,Do not use furnace welding and dip soldering methods.

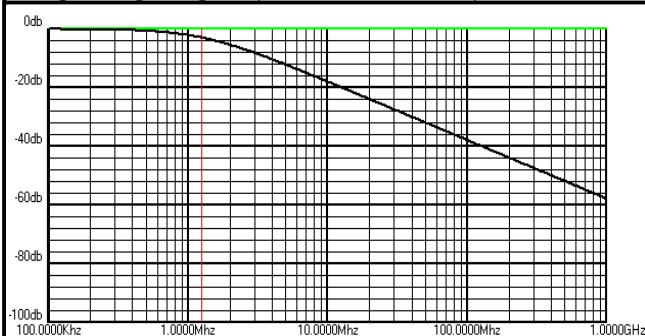

-Tolerance-

Unless otherwise specified

Soldering Temp $\leq$ 300°C

SolderingTime: 3S

Title:

Feed-thru Filter

Unit:(mm)

LCA[®]

H4033-005