




Sales Drawing

Do not Scale it()



Electrical Testing:

As Xiang wei standard test plans and GB/T-2828 AQL value Test Method.

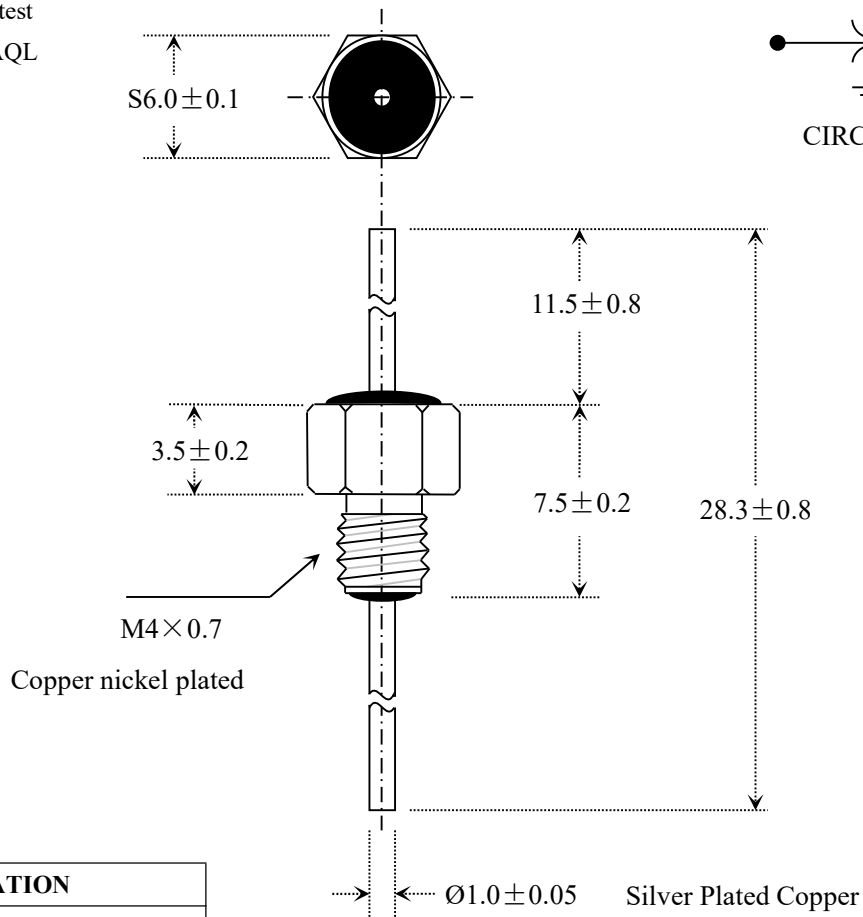


SPECIFICATION

Capacitance	1000pF
Dissipation Factor	<3.5%
Cap Tolerance	-20%+80%
Dielectric	X7R
Rating Voltage	100VDC
D.W.V.	300VDC
Current(A)	10
I.R.100vdc	3000M Ω
Operating Range	-55°C+125°C

Notes:

- 1、 It is strictly prohibited to strike the capacitor body with hard objects or use excessive way to install the capacitor.
- 2、 long time working in the environment higher than 125 °C may cause damage to the capacitor.
- 3、 it is recommended to use a constant temperature soldering iron welding, prohibited the use of dip welding welding.

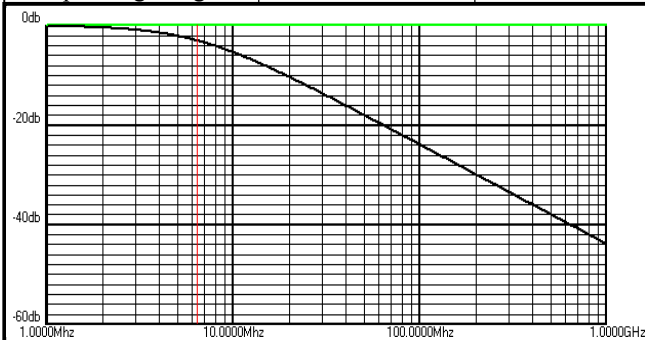

Installation torque

0.3 N·m

Soldering Temp $\leq 300^\circ\text{C}$

Soldering Time: 3S

Title:

Feed-thru Filter

Unit: (mm)

LCA[®]

L6040-058N